EOR M E M. 1390 THE DEPARTMENT OF COMMERCE PATENT AND ITS ADDRESS OFFICE ATTORNEY 'S DOCKET NUMBER H55-062 US TRANSMITTAL LETTER TO THE UNITED STATES U.S. APPLICATION NO (If known, see 37 CFR 15 DESIGNATED/ELECTED OFFICE (DO/EO/US) 10/069904 CONCERNING A FILING UNDER 35 U.S.C. 371 PRIORITY DATE CLAIMED INTERNATIONAL APPLICATION NO. INTERNATIONAL FILING DATE August 31, 2000 August 31, 1999 PCT/AT00/00236 TITLE OF INVENTION DEVICE FOR ADMIXING GAS TO A PLASTIC MELT APPLICANT(S) FOR DO/EO/US Georg STEINBICHLER Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information: 1. X This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. 🗵 This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below. The US has been elected by the expiration of 19 months from the priority date (Article 31). 5. X A copy of the International Application as filed (35 U.S.C. 371(c)(2)) a. 
is attached hereto (required only if not communicated by the International Bureau). | has been communicated by the International Bureau. is not required, as the application was filed in the United States Receiving Office (RO/US). 6. An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). is attached hereto. has been previously submitted under 35 U.S.C. 154(d)(4). 7. X Amendments to the claims of the International Aplication under PCT Article 19 (35 U.S.C. 371(c)(3)) are attached hereto (required only if not communicated by the International Bureau). b. have been communicated by the International Bureau. c. have not been made; however, the time limit for making such amendments has NOT expired. d. | have not been made and will not be made. 8. An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)). 9. X An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. An English lanugage translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). Items 11 to 20 below concern document(s) or information included: An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 11.  $\square$ 12. X An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. X A FIRST preliminary amendment. A SECOND or SUBSEQUENT preliminary amendment. 14. 15. A substitute specification. 16. A change of power of attorney and/or address letter. 17. A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825. 18. A second copy of the published international application under 35 U.S.C. 154(d)(4), 19. A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). 20. Other items or information:

15. APPLATON/0069904 PCT/AT00/00236					ATTORNEYS DO H55-062 U			
21. The following fees are submitted:					CULATIONS	PTO USE ONLY		
BASIC NATIONAL Neither internation nor international se	FEE (37 CFR 1.492 al preliminary exami arch fee (37 CFR 1.4 earch Report not prej							
International prelin	ninary examination fe tional Search Report							
USPTO but International Search Report prepared by the EPO or JPO								
International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4)								
International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4)					00.00	1		
ENTE	R APPROPRIA	TE BASIC FEE AMO	UNI =	2 S	90.00			
Surcharge of \$130.00 months from the earl	) for furnishing the o iest claimed priority	ath or declaration later than date (37 CFR 1.492(e)).	20 30	\$				
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$				
Total claims	3 - 20 =		x \$18.00	\$				
ndependent claims	1 -3 =		x \$80.00	\$				
MULTIPLE DEPEN	DENT CLAIM(S) (if	applicable)	+ \$270.00	\$				
	TOTAL	OF ABOVE CALCU	LATIONS =	\$ 89	00.00			
Applicant claim are reduced by	s small entity status.	See 37 CFR 1.27. The fees		\$				
	****	SI	JBTOTAL =	\$ 8	90.00			
Processing fee of \$13 months from the earl	0.00 for furnishing t iest claimed priority	\$						
		TOTAL NATIO	NAL FEE =	\$ 89	90.00	1		
Fee for recording the accompanied by an a	enclosed assignmen ppropriate cover she	t (37 CFR 1.21(h)). The assi et (37 CFR 3.28, 3.31). \$40.	gnment must be 00 per property +	\$	0.00			
t desired to the second		TOTAL FEES E	NCLOSED =	\$ 93	0.00	-		
		TOTHETEESE	TTELOSED	Amo	unt to be efunded:	\$		
					charged:	\$		
a.   A check in the amount of \$ 930.00 to cover the above fees is enclosed.  b. Please charge my Deposit Account No. in the amount of \$ 930.00 to cover the above fees.  A duplicate copy of this sheet is enclosed.  c. The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 14-1431 . A duplicate copy of this sheet is enclosed.  d. Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card								
information	should not be inclu appropriate time lin	nit under 37 CFR 1.494 or steed to restore the application	credit card information	n and a	uthorization o	n PTO-2038.		
SEND ALL CORRESPO	NDENCE TO.	2:1						
Notaro & Michalos P.C.								
					Michalos			
Orangeburg, New York 10962-2100 28,64								
77' - 7					NUMBER 21, 2002			

CERTIFICATE OF EXPRESS MAILING

I hereby certify that this correspondence is being deposited with the U.S. Dostal Service as Express Mail Label No. EW 064027054 US in an envelope addressed to Box PCT. Commissioner for Patents, 2900 Crystal Drive, Arlington, VA 22202-3513 on February 21, 2002

By: Germaine Brenkert
Dated: February 21, 2002

Patent Atty. Docket: H55-062 US

#### IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant :

Georg Steinbichler

PCT No.

PCT/AT00/00236

Filing Date

August 31, 2000

For

DEVICE FOR ADMIXING GAS TO A PLASTIC

MELT

Box PCT

Commissioner for Patents Washington, D.C. 20231

#### PRELIMINARY AMENDMENT

Sir:

Preliminary to the examination of the above-identified application, please amend the application as follows.

# IN THE CLAIMS:

Please amend the claim 3 as follows:

--3. (Amended) Apparatus as set forth in claim 1 characterised in that there is provided a sensor (6) for measuring the molten material pressure.--

### REMARKS:

Claims 1-3 are in the case and presented for consideration.

Claim 3 has been amended to delete the multiple dependency and to place the same in better form for U.S. practice. No new matter has been added.

Entry of the above is respectfully requested.

Respectfully submitted,

Peter C. Michalos Reg. No. 28,643

Attorney for Applicants

(845)359-7700

Dated: February 21, 2002

NOTARO & MICHALOS P.C. 100 Dutch Hill Road, Suite 110 Orangeburg, NY 10962-2100

Version with markings to show changes made U.S. Applin No. ACT/AT00/100 236

#### CLAIMS

- 1. Apparatus for adding supercritical and therefore substantially incompressible gas to a molten plastic material, with gas injectors which open into the mixing stage of a screw which also serves for plasticising the plastic material, characterised in that disposed immediately upstream of the gas injectors (5) is a metering piston (18) whose travel speed is proportionally greater, the greater is the return travel speed of the screw (4) in the plasticising procedure.
- 2. Apparatus as set forth in claim 1 characterised in that the metering piston (18) is part of a pressure booster (10).
- 3. Apparatus as set forth in claim 1 or claim 2 characterised in that there is provided a sensor (6) for measuring the molten material pressure.

# IN THE UNITED STATES PATENT AND TRADE MARK OFFICE

## VERIFICATION OF TRANSLATION

I, Michael Wallace Richard Turner, Bachelor of Arts, Chartered Patent Attorney, European Patent Attorney, of I Horsefair Mews, Romsey, Hampshire SO51 8JG, England, do hereby declare that I am conversant with the English and German languages and that I am a competent translator thereof;

I verify that the attached English translation is a true and correct translation made by me of the attached specification in the German language of International Application PCT/AT00/00236;

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Date: January 28, 2002

leb & derine.

M W R Turner

10

15

20

25

30

#### APPARATUS FOR ADDING GAS TO A MOLTEN PLASTIC MATERIAL

Processes for the production of foam structural parts of thermoplastic materials were already being developed in the middle of the Sixties. The use of those processes resulted in moldings with a more or less compact outer skin and a closed-cell foamed core. An aspect which is particularly attractive in terms of uses is the possibility of saving weight and the increase in rigidity, with the same component weight.

Basically the known processes differ on the following points:

- use of chemical or physical propellant,
- filling the tool with molten material, with or without a gas counterpressure,
- mode of operation with or without a mold cavity variation for the foaming process, and
  - use of a tool cooling system or a combined heating-cooling system.

In the traditional TFM process (Thermoplastic Foam injection Molding Process) in particular molten thermoplastic materials provided with chemical propellants are injected at high speed. The tool cavity is only partially filled - the remaining filling or shaping of the component geometry is implemented by the expansion pressure of the propellant. As chemical propellants only apply foaming pressures of up to 30 bars the process is limited in terms of wall thickness and flow paths which can be traversed as well as the shaping of more complex component geometries.

Chemical propellants or foaming agents are substances which break down under the effect of heat and in so doing give off gaseous decomposition products which implement the foaming operation. Physical propellants for foam injection molding are inert gases dissolved in the molten plastic material such as for example nitrogen or liquids which evaporate at low temperature. That means that the procedure is independent of the temperature decomposition range of chemically acting

25

30

propellants and it is also possible to foam plastic materials which are otherwise sensitive to resulting products from chemical propellants.

If the inert gases used such as for example nitrogen or  $CO_2$  are put into a supercritical condition prior to the additive metering procedure, as is taught in US-A 4 473 655 and US-A 5 160 674, it is possible to produce a particularly uniformly distributed cell structure.

That supercritical condition of a gas affords the following advantages for the foaming process:

- liquid-like low compressibility for quantitatively accurate metering control, and
  - high level of solubility and diffusion speed for uniform distribution and dissolution of the gas in the molten material.

The essential process steps of the microstructure foaming process are:

- homogenous fusion of the plastic material in the barrier screw portion,
  - accurate quantitative metering control of the gas which has been put into the supercritical condition, by way of gas injectors, in the mass cylinder,
- 20 fine distribution and dissolution of the gas in the molten polymer material in the screw mixing zone,
  - formation of finely dispersed nucleation seeds due to the pressure drop at the beginning of the tool filling procedure,
  - cell formation due to dissolved gas coming out of the molten material during the tool filling process, and
  - cell growth due to the acting gas pressure in the cooling-down phase due to shrinkage compensation.

The essential advantages of the process are:

- the viscosity of the molten material is markedly reduced by virtue of use of the 'supercritical fluid' as a physical propellant. In extreme cases the injection pressure is reduced to 50% with the same mass temperature. Flow path-wall thickness ratios which can be achieved can also be markedly increased for plastic materials which are more difficult to cause to flow.

10

15

20

- Due to the improved flow capability and the post-pressure which acts internally by way of the gas pressure, the closing force required can be reduced, depending on the respective situation involved, to 60%.
- The internally acting gas pressure takes over the post-pressure function collapse locations even at the end of the flow path can be avoided thereby. With a lower degree of foaming, there is the possibility of saving in terms of cooling time, in spite of poorer thermal conductivity. That is the case in particular when the amount of molten material which is otherwise still being introduced into the post-pressure phase determines the cooling time.
  - With the same desired flow capability, the processing temperature can be markedly lowered and thus the cooling time can also be shortened.
- The lower filling pressure and the more uniform pressure distribution by virtue of the acting gas pressure, without partial post-pressure action, reduces distortion problems to a minimum.

Reference is made to Figure 1 to describe the apparatus which represents the state of the art and which is used at the present time for the described process. This involves an apparatus for admixing compressed gas to a molten plastic material with gas injectors which open into the mixing stage of a screw which also serves for plasticising the plastic material, comprising the following essential components:

- 1. gas supply from bottles, liquefied gas tank or gas-generating installation by decomposing air,
- gas processing installation with compressor and quantitative gas
  metering unit,
  - 3. mass cylinder,
  - 4. screw with plasticising portion and downstream-connected propellant mixing stage,
    - 5. gas injectors,
- 6. mass pressure sensor,
  - 7. air-cooled heating belts in the mixing stage,
  - 8, closure nozzle,
  - 9. machine control with process-specific software.

15

20

25

30

The crucial consideration for the foaming procedure is uniform quantitative gas metering into the molten material by way of the gas injectors. In the known process quantitative gas metering is effected by way of measuring cells and quantitative regulating valves in the gas processing installation 2. In that case the gas has to be passed to the gas injectors 5 by way of relatively long hose and/or plpe connections. Metering inaccuracies occur by virtue of compressibility and pressure losses in the conduits. In addition there is no feedback between the molten material conveyor output or capacity of the plasticising and mixing screw and the quantitative gas metering unit in the gas processing installation. The same amount of gas is always meteredly added when conveyor output differences occur in the screw, in relation to time. Different amounts of gas in an element of volume of the molten material being considered and partially different degrees of foaming in the component are the consequence thereof.

The invention is based on the notion that, after reaching the supercritical condition, the gas behaves substantially like a liquid and its density within the limits of the pressure differences occurring can be viewed to a good degree of approximation as being constant. That permits accurately metered addition of gas using simple structural means, insofar as it is provided that disposed immediately upstream of the gas injectors is a metering piston whose speed of travel is correspondingly greater, the greater the speed of return travel of the screw in the plasticising procedure.

An embodiment of an apparatus of that kind is described hereinafter with reference to Figure 2.

The quantitative gas metering operation is effected by way of a pressure transmitter or booster 10 driven by a hydraulic assembly 11. The pressure booster is mounted in the immediate proximity of the gas injectors 5 on the mass cylinder 3 in order to have very short conduit lengths and thus also very small dead volumes. The supply of gas (for example  $N_2$  or  $CO_2$ ) to the pressure booster 10 is effected by way of a gas pre-compressor unit 12 or directly from gas bottles, liquid tanks or air decomposition installations. The pressure booster can also perform the gas-

15

20

25

30

compressing function. In that way it is possible to omit an additional gas pre-compressor unit.

## Operating procedure:

- the gas intake flow valve 13 at the pressure booster 10 is opened and gas flows into the pressure booster chamber. The pressure booster is pushed back by the inflowing gas or also with hydraulic assistance and in so doing the oil on the hydraulic side is expelled from the piston to the tank.
- When the limit position of the piston is reached the gas intake valve 13 is closed.
- Compression of the gas in the pressure booster 10 is effected by a hydraulically controlled or regulated advance movement until a gas pressure which is set at the machine control 9 is reached. Measurement of the current gas pressure is effected by way of the gas pressure sensor 14.
- With the beginning of the plasticising and molten material metering procedure by starting the rotary movement of the screw, the first gas injector 5 is opened and, in dependence on the measured screw return movement speed, the piston forward travel speed of the pressure booster 10 is regulated by way of a regulating valve 15 in order to urge an amount of gas which is preset at the control means, into the mass cylinder of the injection molding machine.
- When a given screw position is reached, the next gas injector 5 is opened. The prevailing molten material pressure in the mass cylinder is measured in the proximity of the gas injectors, by way of the pressure sensor 6. The measured molten material pressure for transportation of the molten material through the gas mixing zone and for overcoming the dynamic pressure (set counterpressure for the rearward movement of the screw) supplies the necessary information about the required level of pressure for pre-compression of the gas. That provides that the gas no longer has to be heavily compressed in the pressure booster 10 before gas is introduced in a metered fashion against the prevailing molten material pressure (for example 200 bars).
- The gas pressure which is measured in the pressure booster and the measured molten material pressure can be used for monitoring the

10

15

molten material and gas metering process. The process graphics in the machine control 9 detects the pressure patterns and monitors the reproduction accuracy of the metering process over a predetermined tolerance range.

- The amount of gas introduced under pressure is ascertained by way of a gas density function in dependence on pressure and temperature for each molten material metering cycle and monitored on the basis of adjustable limit values by way of the machine control 9. The pressure booster is equipped with a travel measuring system 16 for that purpose.
- With the termination of the molten material metering process, the last gas injector is closed and the molten material is held under a given pressure in order to avoid premature foaming-up thereof.

With the gas booster structure it is also possible to supply a plurality of injection molding machines without using a gas processing unit at each injection molding machine, by way of gas ring conduits.

## **CLAIMS**

- 1. Apparatus for adding supercritical and therefore substantially incompressible gas to a molten plastic material, with gas injectors which open into the mixing stage of a screw which also serves for plasticising the plastic material, characterised in that disposed immediately upstream of the gas injectors (5) is a metering piston (18) whose travel speed is proportionally greater, the greater is the return travel speed of the screw (4) in the plasticising procedure.
- 2. Apparatus as set forth in claim 1 characterised in that the metering piston (18) is part of a pressure booster (10).
- Apparatus as set forth in claim 1 or claim 2 characterised in that there is provided a sensor (6) for measuring the molten material pressure.


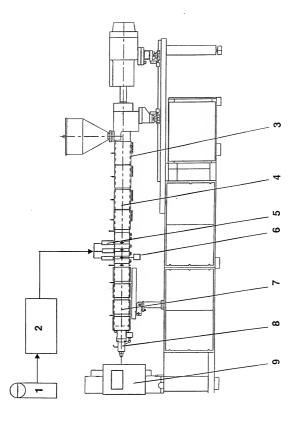


Fig. 1

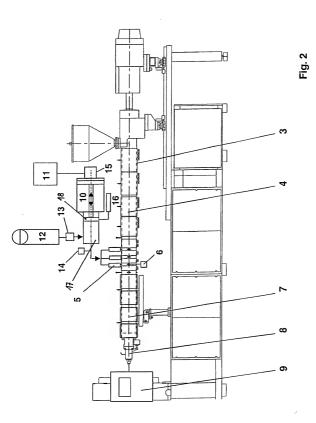

inergor . The iner

# Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

DEVICE FOR ADMIXING GAS TO A PLASTIC MELT the specification of which (check one):

- [x] is attached hereto
- [ ] was filed on as Application Serial No. and was amended on \_\_\_\_\_ (if applicable).
- I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.
- I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.
- I hereby claim foreign priority benefits under Title 35, United States Code, \$119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

71 1..... 1000

Prior Foreign Applications

Augenia

CM 597.700

Priority Claimed

(Number)	(Country)	(Day/Month/Year Filed)	Yes [x]	[]
PCT/AT00/00236	PCT	31 August 2000	Yes	No
(Number)	(Country)	(Day/Month/Year Filed)	[ <sub>x</sub> ]	[ ]

I hereby claim the benefits under Title 35, United States Code, \$119(e) of the following United States Provisional Application:

Priority Claimed

Yes No (Number) (Day/Month/Year Filed) f 1 [ ]

I hereby claim the benefit under Title 35, United States Code, \$120 of any United States application(s) listed below, and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, \$112, I acknowledge the duty to disclose information which is material to patentability as

, ag	
lefined in Title 37, Code of Federal Regulations, \$1.56 which became available between the filing date of the prior application the national or PCT international filing date of this application.	ion
This application is a of U.S. Application	
Serial No. Filing Date Status (Patented, Pending, Abandoned)	
hereby declare that all statements made herein of my own moviledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the inited States Code and that such willful false statements may leopardize the validity of the application or any patent issue thereon.	
OWER OF ATTORNEY: As a named inventor, 1 hereby appoint the collowing attorney(s) and/or agent(s) to prosecute this upplication and transact all business in the Patent and Trademofffice connect ed therewith.	ark
Angelo Notaro Reg. No. 27,664  Reg. No. 28,643	
Mark A. Conklin John Zaccaria Martin A. Levitin Reg. No. 39,148 Reg. No. 40,241 Reg. No. 24,479	
Send Correspondence to:	
NOTARO & MICHALOS P.C. Empire State Building 350 Fifth Avenue Suite 6902 New York, New York 10118-6985	
Direct Telephone Calls to: (212) 564-0200	
Georg STEINBICHLER	
121 name of fold of first inventor  23 - 01 - 2002	
Rottenmann/Austria	
Residence Austrian Itizenship	
Boder 59, A-8786 Rottenmann/Austria	
Full name of second inventor, if any	
Inventor's signature Date	
Residence	

Post Office Address

Citizenship